



inSTYLE



Home Page

Products

Dealers

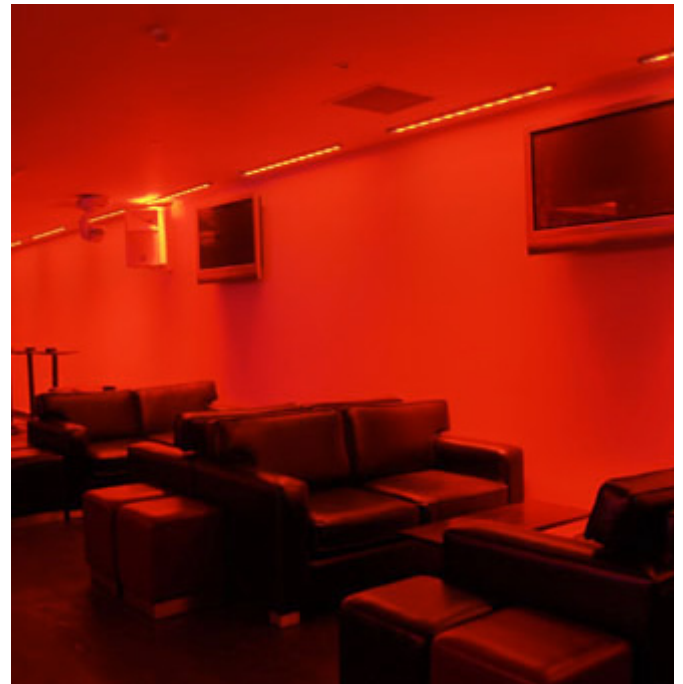


INLO - 9 RGB 350mm

The Instyle Hi Lux Linear Optic consists of 9 high powered 1 watt [Cree](#) X lamp 7090 LEDs


[Cree](#) LEDs lead the industry in brightness and efficiency for solid state lighting applications. A quality precision optic with clip on beam angle lens is fitted to maximise the LED output. An ideal solution for washing large areas i.e. walls, ceilings.

DIMENSIONS

Length:

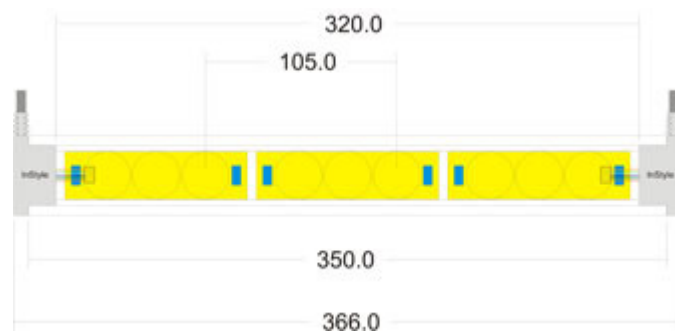

Depth:
Height:

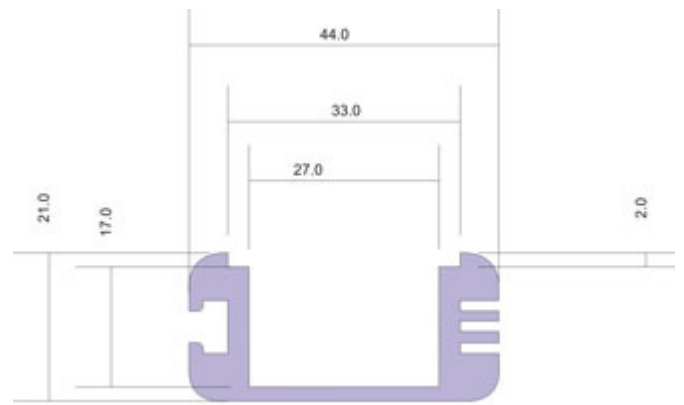

CONSTRUCTION:
INSTALLATION METHOD:
FLAMMABILITY:

Silver anodised aluminium
Stainless Steel Adjustable Brackets
94v-0 flame class rating

TECHNICAL SPECIFICATION.

NO. LEDS	9
INPUT VOLTAGE:	48 VOLTS DC
MAXIMUM POWER CONSUMPTION:	10.8 WATTS
POWER/ DATA CONNECTION:	RJ45 8 WAY
POWER SUPPLY:	IND36 Colour Driver
OPERATING AMBIENT TEMPERATURE RANGE:	-20c/+40c
OPERATING TEMPERATURE:	+50c @ ambient 25c
COOLING SYSTEM:	conductive cooling system
OPTICAL SYSTEMS AVAILABLE:	6 degree, 15 degree, 25 degree, oval
TYPICAL LUMEN MAINTENANCE:	70% @ 50,000 hours
LED LIFE EXPECTANCY:	minimum 50,000 hours

32 Main Street, Willoughby Waterleys, Leicester, England, LE8 6UF
Tel: +44 (0)116 2799083 Email: info@instyleuk.net